



### AK(Z) 500 VERTICAL

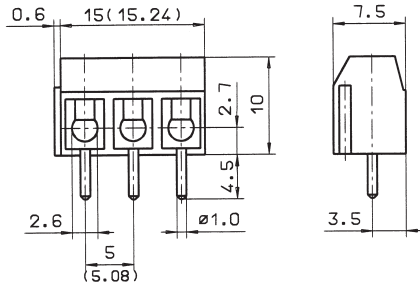

### AK(Z) 500 HORIZONTAL

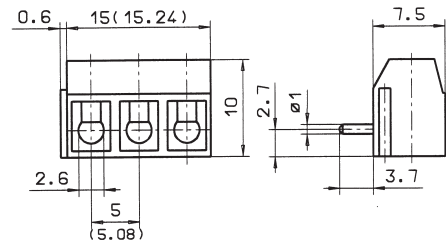

**AK(Z) 500/.. DS - 5,0 (5,08) - V - grey**




**2-12 poles, Spacing 5,0 mm or 5,08 mm  
insert required no. of poles ..**



**AK(Z) 500/.. DS - 5,0 (5,08) - H - grey**

**2-12 poles, Spacing 5,0 mm or 5,08 mm  
insert required no. of poles ..**

#### Ratings:

			
	UL 1059	CSA 22.2 No. 158	EN 60998
Rated voltage	300 V	300 V	250 V
Rated current	15 A	15 A	17,5 A (T60)
Wire Size	AWG 22-14	AWG 22-14	1,5 mm <sup>2</sup>
Test voltage			2,0 kV
Rated Torque / Screw Size			0,4 Nm/M2,6
<b>Max. Rated Cross Section</b>			
Single Wire (solid)			1,5 mm <sup>2</sup>
Stranded Wire (flexible)			1,0 mm <sup>2</sup>
Stranded wire with Ferrules			0,75 mm <sup>2</sup>




#### Dimensions

Spacing	5,0 mm (5,08 mm)
PCB hole diameter	1,3 mm
Stripped length	6,0 mm

#### Materials

Insulating material	PA
Flammability class	UL94 V-0
Temperature range	-30°C/+105°C
Terminal block	CuZn
Wire guard	stainless steel
<b>Colour</b>	
grey	RAL 7016

#### Ratings:

			
	UL 1059	CSA 22.2 No. 158	EN 60998
Rated voltage	300 V	300 V	250 V
Rated current	15 A	15 A	17,5 A (T60)
Wire Size	AWG 22-14	AWG 22-14	1,5 mm <sup>2</sup>
Test voltage			2,0 kV
Rated Torque / Screw Size			0,4 Nm/M2,6
<b>Max. Rated Cross Section</b>			
Single Wire (solid)			1,5 mm <sup>2</sup>
Stranded Wire (flexible)			1,0 mm <sup>2</sup>
Stranded wire with Ferrules			0,75 mm <sup>2</sup>

#### Dimensions

Spacing	5,0 mm (5,08 mm)
PCB hole diameter	1,3 mm
Stripped length	5,0 mm

#### Materials

Insulating material	PA
Flammability class	UL94 V-0
Temperature range	-30°C/+105°C
Terminal block	CuZn
Wire guard	stainless steel
<b>Colour</b>	
grey	RAL 7016